Nonlinear Internal Waves - A Wave-Tracking Experiment to Assess Nonlinear Internal Wave Generation, Structure, Evolution and Dissipation over the NJ Shelf / Analysis

James N. Moum
College of Oceanic & Atmospheric Sciences
Oregon State University
Corvallis, OR 97331-5503

ph: (541) 737-2553 fx: (541) 737-2064 email: moum@coas.oregonstate.edu

Award #: N00014-08-1-0299 http://mixing.coas.oregonstate.edu/

LONG-TERM GOALS

The thrust of this project is the investigation of non-linear internal waves which appear as waves of depression when propagating on a near-surface interface and as waves of elevation when propagating on a near-bottom interface. Waves of depression will initiate the generation of waves of elevation as they propagate into shallow water where the interface depth below the surface nears its height above bottom. We have had the good fortune to observe (by shipboard wave-tracking and from bottom-moorings) both waves of depression and of elevation propagating inshore from the Oregon shelf break into shallow water. We have now also had the further good fortune to make a systematic and comprehensive study of the generation, structure, evolution and dissipation of non-linear internal waves over the New Jersey shelf within the context of the heavily-instrumented combined acoustic / environmental array deployed in summer 2006.

The long-term goal of this program is to understand the physics of small-scale oceanic processes including internal waves, hydraulics, turbulence and microstructure that act to perturb and control the circulation in coastal oceans and, in doing so, affect the propagation of sound and light. Ongoing studies within the **Ocean Mixing Group** at OSU emphasize observations, interaction with turbulence modelers and an aggressive program of sensor / instrumentation development and integration.

OBJECTIVES

Specific objectives for this proposal are to:

- complete preliminary analysis of all data obtained in this experiment for dissemination among NLIWI investigators;
- clarify the detailed internal structure of NLIWs from SW06 observations, previous observations over the Oregon shelf and from turbulence measurements made on Niiler-type drifters in the South China Sea;
- assemble a census of NLIW kinetic and potential energies to discern the tendency for equipartition and, perhaps more importantly, to determine under what conditions energy is not equipartitioned;
- coordinate with J. Nash to define a consistent approach for computing wave displacement and energetics using the comparative strengths of both moored (spatially sparse; temporally resolved) and shipboard observations (well-resolved but only for a limited number of waves during a limited time period);

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to maintaining the data needed, and completing and reviewing the collect including suggestions for reducing this burden, to Washington Headqu VA 22202-4302. Respondents should be aware that notwithstanding and does not display a currently valid OMB control number.	ion of information. Send comments r arters Services, Directorate for Information	regarding this burden estimate mation Operations and Reports	or any other aspect of the 1215 Jefferson Davis	is collection of information, Highway, Suite 1204, Arlington	
1. REPORT DATE	2. REPORT TYPE		3. DATES COVE	RED	
30 SEP 2008	Annual			3 to 00-00-2008	
4. TITLE AND SUBTITLE		5a. CONTRACT NUMBER			
Nonlinear Internal Waves - A Wave-T Nonlinear Internal Wave Generation,		5b. GRANT NUMBER			
Dissipation Over The NJ Shelf / Analysis			5c. PROGRAM ELEM		
6. AUTHOR(S)			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Oregon State University, College of Oceanic & Atmospheric Sciences, Corvallis, OR, 97331-5503			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/M NUMBER(S)	ONITOR'S REPORT	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution	ion unlimited				
13. SUPPLEMENTARY NOTES code 1 only					
14. ABSTRACT The thrust of this project is the investig depression when propagating on a near near-bottom interface. Waves of depression propagate into shallow water where the We have had the good fortune to observaves of depression and of elevation propagate into shallow water where the We have now also had the further good generation, structure, evolution and diwithin the context of the heavily-instructure and the summer 2006.	r-surface interface a ession will initiate the e interface depth be eve (by shipboard wa ropagating inshore f d fortune to make a ssipation of non-line	and as waves of e e generation of w low the surface r ave-tracking and from the Oregon systematic and c ear internal wave	levation when vaves of elevantears its heigh from bottom shelf break in comprehensives over the Ne	n propagating on a tion as they at above bottom. a-moorings) both at oshallow water. e study of the aw Jersey shelf	
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:		17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON	

c. THIS PAGE

unclassified

Same as

Report (SAR)

6

a. REPORT

unclassified

b. ABSTRACT

unclassified

- define the wave energy balance along its propagation path;
- describe and quantify the structural and energetic evolution of the relatively slowly-propagating waves as they shoal over the gentle NJ shelf and compare this with the evolution of rapidly-propagating SCS waves as they shoal over steeper terrain;
- investigate the effects of wave-wave and group-group interactions;
- assist D. Rouseff and DJ Tang (APL/UW) in defining a deterministic representation of NLIW propagation from joint medium-frequency acoustic / shipboard wave-tracking studies;
- assist M. Badiey (U Delaware) in an analysis of sound focusing / defocusing due to propagating nonlinear internal waves;
- assist Andone Lavery (WHOI) in defining the acoustic frequency/wavenumber backscatter spectrum of turbulence using coincident acoustic / turbulence observations.

APPROACH

For NLIWI/SW06, we combined acoustic flow imaging techniques with shipboard ADCP and microstructure profiling measurements (using CHAMELEON). This has permitted an observational view of shoreward-propagating internal solitary waves (both near the surface and near the bottom) not previously achieved. These observations have been supplemented by deployment of 4 bottom landers outfitted with upward-looking ADCP (to obtain water column velocity profiles), acoustic Doppler velocimeters (to detect the turbulent component of the velocity signal at 1 m height above the seafloor) and CTD. Three of these landers were also outfitted with high-resolution pressure sensors.

For NLIWI/SW06, we collaborated with Andone Lavery (WHOI), who deployed a high-frequency broadband acoustic backscattering system intended to obtain a remote measure of the turbulence that we coincidentally sample *in situ* using Chameleon. The resultant data set is extensive and offers a new look at the internal structure of the waves. We also coordinated measurements to support acoustics experiments during SW06 to examine sound focusing / defocusing due to nonlinear internal waves (M. Badiey, U. Delaware) and to examine the effects of nonlinear internal waves on short range propagation of mid-frequency sound (DJ Tang, APL/UW).

WORK COMPLETED

From 30 July 2006 to 26 August 2006, we made shipboard observations of NLIWs within the SW06 mooring array from the *RV Oceanus*. These observations consist of:

- o more than 7500 Chameleon turbulence profiles of temperature, salinity, density, turbulence dissipation rate (ε) and oprical backscatter;
- o hull-mounted 300 kHz Acoustic Doppler current profiles at 5 s, 2 m resolution;
- o over-the-side, near-surface 1200 kHz ADCP measurements at 2 s, 1 m resolution this configuration provided data from about 2.5 m depth, at least 5 m closer to the surface than can be obtained from a unit mounted in the ship's transducer well. Such data are especially critical in relation to radar studies of the sea surface;
- high-frequency (120 kHz) echosounder these data provide qualitative imagery of the waves but are also calibrated and thus can be used to assess the turbulence contribution to the narrowband acoustic field;
- o X-band radar recorded continuously at 30 s intervals.

These wave-tracking observations yielded 26 named waves (Figure 1), most of which were tracked from or shortly following generation to the point where their energy had decreased below detection levels. A file of named wave time/positions has been distributed and used by experiment PIs and is available on SW06 and OSU Ocean Mixing websites.

ADCP data have been processed and shared with all who have made requests (primarily those investigating magnetic anomalies and surface radar signatures). A full data set is available on SW06 and Ocean Mixing websites.

Four bottom landers were deployed as part of the intensive SW06 array. And three χpods were deployed on one of the Niiler-style drifters deployed by Luca Cenurioni and Peter Niiler in the South China Sea in May 2007 as part of the South China Sea component of NLIWI.

Several papers were published, including an overview of both acoustics and physical oceanography aspects of SW06 in *Oceanography* (Tang et.al., 2007). Two other review papers are now in press that benefited from this project, including analysis and figures (Moum, Nash and Klymak, 2008; Moum and Rippeth, 2008). Several other papers more specific to SW06 are listed under Publications.




Figure 1 Site bathymetry, mooring location (red and blue diamonds) and wave transect boundary (grey cloud; this defines the region over which waves were tracked).

RESULTS

1. We have documented patterns of structural changes that nonlinear internal waves undergo as they propagate long distances (100s of wavelengths) into shallow water. Nearly symmetric waves develop consistent asymmetries in which the leading edge accelerates causing the front face to broaden while the trailing edge remains steep. This ultimately results in polarity reversal in which an elevation wave forms from the depression wave (Figure 2). The transition is diagnosed by the integrated wave vorticity (which changes sign as the wave's polarity changes sign), and is predicted by simple theory, when properly evaluated using observed shear and stratification (Shroyer et.al., 2008a).

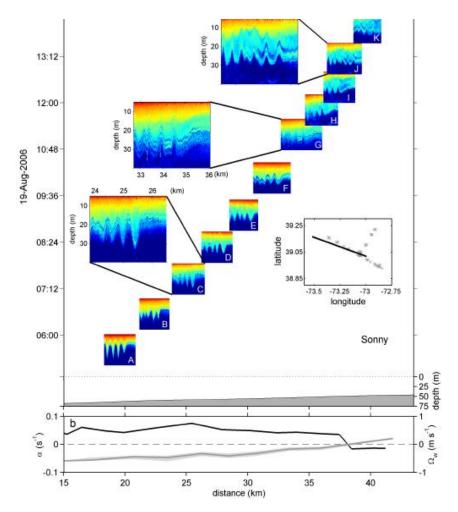


Figure 2 – Polarity reversal in nonlinear internal waves. a) Acoustic backscatter transects taken perpendicular to wave front for Wave Sonny. Each series has been corrected for Doppler shifting so that waves may be viewed in a spatial frame with minimal distortion. The horizontal axes for each panel (A–K) are accurately scaled to the distance axis; the vertical axes for (A–K) are centered about the time of the lead wave. Select transects are enlarged in order to highlight details of structural evolution. For reference purposes, water column depth is plotted at the bottom. Lower right inset shows mooring array and approximate wave path (black line). b) The predicted critical point defined by the parameter, a, is plotted in gray on the left-hand side, and the observed transition point given by the sign of the maximum integrated wave vorticity, O_w , is plotted in black on the right-hand side (from Shroyer et al, 2008).

- 2. It is clear that waves with more complicated structure than elevation / depression waves are part of the wave hierarchy on continental shelves (Figure 3; Moum, Nash and Klymak, 2008). These may be referred to as mode-2, or varicose, waves. They are energetically weak by comparison to the dominant depression waves on the NJ shelf. Further analysis will comprise part of Emily Shroyer's thesis.
- 3. We have measured the seafloor pressure signal of nonlinear internal waves (Moum and Nash, 2008).

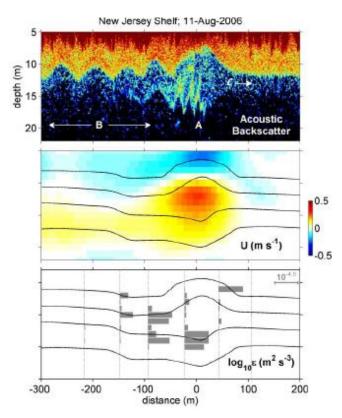


Figure 3 - upper panel – acoustic backscatter; middle panel – onshore wave velocity, U, with isopycnals contoured; lower panel, turbulence dissipation rate, from shipboard measurements over the New Jersey shelf in 85 m water depth. Shoreward direction is to the right. (to appear in Moum, Nash and Klymak, 2008).

Three papers are currently in progress:

A description of the nonlinear internal wave field over New Jersey's continental shelf. for *J. Phys. Oceanogr.* (E.L. Shroyer, J.N. Moum, and J.D. Nash)

Energy transformations in the evolving nonlinear internal wave field over New Jersey's continental shelf. for *J. Geophys. Res.* (E.L. Shroyer, J.N. Moum, and J.D. Nash)

Mesoscale influences on the generation of the internal tide and nonlinear internal waves over New Jersey's continental shelf. for *J. Phys. Oceanogr.*, (J.D. Nash, E.L. Shroyer, J.N. Moum, T. Duda, H. Graber, J. Irish and J.F. Lynch)

IMPACT/APPLICATION

Experimental verification of the existence, sign and magnitude of the bottom pressure signature of NLIWs indicates what we understand the physical structure of the wave pressure signal. This permits extension of the measurement to practical applications such as simple wave detection and more scientific applications such as inexpensive multi-component wave antennae.

Our analysis of energy transformations over the NJ shelf will contribute to global evaluations of NLIW energetics.

RELATED PROJECTS

The SW06 experiment involves collaboration with a large range of PIs, including physical oceanographers and acousticians. Acoustics collaborations with Mohsen Badiey (Delaware), DJ Tang (APL/UW) and Andone Lavery (WHOI) are ongoing. The examination of nonlinear internal waves has included collaborations with David Farmer (URI), Larry Armi (SIO), Jody Klymak (SIO), Jonathan Nash (OSU) and Bill Smyth (OSU).

PUBLICATIONS

Moum, J.N., D.M. Farmer, E.L. Shroyer, W.D. Smyth and L. Armi, 2007: Dissipative losses in nonlinear internal waves propagating across the continental shelf, *J. Phys. Oceanogr.*, 37, 1989-1995.

Moum, J.N., J.M. Klymak, J.D. Nash, A. Perlin and W.D. Smyth, 2007: Energy transport by nonlinear internal waves, *J. Phys. Oceanogr.*, 37, 1968-1988.

Tang, D.J., J.N. Moum, J. Lynch, P. Abbott, R. Chapman, P. Dahl, T. Duda, G. Gawarkieweicz, S. Glenn, J. Goff, H. Graber, J. Kemp, A. Maffei, J. Nash and A. Newhall, 2007: Shallow Water '06 – A Joint Acoustic Propagation / Nonlinear Internal Wave Physics Experiment, *Oceanography*, 20(4), 156-167.

Moum, J.N. and J.D. Nash, 2008: Seafloor pressure measurements of nonlinear internal waves. *J. Phys. Oceanogr.*, 38, 481-491.

Shroyer, E.L., J.N. Moum and J.D. Nash, 2008: Observations of polarity reversal in shoaling nonlinear internal waves, *J. Phys. Oceanogr.*, in press

Moum, J.N. and T.P. Rippeth, 2008: Do observations adequately resolve the natural variability of oceanic turbulence? *J. Mar. Sys.*, in press.

Luo, J., M. Badiey, E.A. Karjadi, B. Katsnelson, A. Tskhoidze, J.F. Lynch and J.N. Moum, 2008: Observations of sound intensity fluctuations due to propagating internal waves passing in the Shallow Water'06 experiment, *J. Acoustic Soc. Amer.*, accepted

Moum, J.N. and J.D. Nash, 2008: Measurements of mixing on an equatorial ocean mooring, *J.Atmos. Oceanic Technol.* accepted

Rouseff, D., D.J. Tang, K. Williams, Z. Wang and J.N. Moum, 2008: Mid-frequency sound propagation through internal waves at short range with synoptic oceanographic observations. *J. Acoustic Soc. Amer.*, accepted

Moum, J.N., J.D. Nash and J.M. Klymak, 2008: Small-scale processes in the coastal ocean, *Oceanography*, accepted

Submitted:

Zaron, E.D. and J.N. Moum, 2008: A new look at Richardson number mixing schemes for equatorial ocean modeling, *J. Phys. Oceanogr.*, in review

Lavery, A.C., D. Chu and J.N. Moum, 2008: Discrimination of scattering from zooplankton and oceanic microstructure using a broadband echosounder. *ICES J. Mar. Science*, in review